

CHILD INFORMATION
(KEEP WITH CAR SEAT AT ALL TIMES IN CASE OF EMERGENCY)

NAME:
.....

DATE OF BIRTH (DD/MM/YYYY):
.....

ADDRESS:
.....
.....
.....

ALLERGIES/MEDICAL CONDITIONS:
.....
.....
.....

EMERGENCY CONTACT 1:

NAME:
.....

PHONE NUMBER:
.....

EMERGENCY CONTACT 2:

NAME:
.....

PHONE NUMBER:
.....



Lancelot i-Size

EST - 507

Instruction Manual

Instruction Manual

We are pleased that our child car seat may accompany your child safely through a new stage of their life.

In order to protect your child correctly, this child car seat must always be used and installed as described in these instructions.

If you have any other questions regarding the usage of this child car seat please contact the retailer or manufacturer.

Contents

1. Important Notice	3
2. Features	5
3. Use in the vehicle	7
4. Adjusting and using the child car seat	8
4-1 Recline adjustment	8
4-2 Harness adjustment	8
4-3 Headrest adjustment	9
4-4 Buckle adjustment	10
4-5 5 point harness system removal	10
4-6 ISOFIX installation and removal	11
4-7 Top Tether usage	12
4-8 Inner cushion usage	12
4-9 Side Impact Protection usage	12
4-10 Removing and refitting	13
5. Installation	13
5-1 76cm-105cm(≤18kg)	
ISOFIX + Top Tether + harness system fitting instructions	13
5-2 100cm-150cm	
Vehicle 3-point belt + optional ISOFIX attachment fitting instructions	14

6. Cleaning and maintenance	15
7. Notice	15
8. Steps to take after an accident	16
9. Warranty	16



1. Important Notice

1. This child car seat is suitable for children when their stature is - 76cm-105cm/≤18kg i-Size-universal ISOFIX, 100cm-135cm i-Size booster seat, 135cm-150cm Specific Vehicle booster seat.
2. Please get the instruction manual from the net bag, inside the back cover of the child car seat.
3. Please read the instruction manual carefully before installation, serious injury may occur if installed incorrectly. The manufacturer will not take responsibility for any risks in this case.
4. Never use the child car seat without the cover. Never use any cover which is not recommended by manufacturer to replace an old cover. The cover constitutes as an integral part of the child car seat's performance.
5. When the child restraint is not provided with a textile cover, the chair should be kept away from direct sunlight, otherwise it may be too hot for the child's skin.
6. The customer is advised not to fit the child car seat in seating positions where there is an active frontal airbag installed.
7. The device should be replaced when it has been subject to violent stresses in an accident.
8. Please ensure all passengers in the car use their safety belt and any loose goods are securely held down, otherwise the passengers and goods may injure the child when in emergency brake situation.
9. The buckle must NOT be in a semi-locked status. Always confirm the child car seat is locked before using, in case of an emergency the child can be taken out quickly.
10. DO NOT make any changes or additions to the harness system of the child car seat as this could seriously affect the security and functionality.
11. It is dangerous to make any alterations to the child car seat without the approval of the Type Approval Authority, and dangerous to not closely follow the installation instructions provided by the child car seat manufacturer.
12. Ensure that children are not left unattended in their car seat.
13. Keep the child car seat away from corrosive substances.
14. Always keep the child car seat secured in the vehicle even when it is unoccupied and ensure that children are not left in their child car seat unattended.
15. DO NOT use a second-hand child car seat.
16. It is important to ensure that any lap strap is worn low down so that the pelvis is firmly engaged.

17. Any straps holding the child car seat to the vehicle should be tight and any straps restraining the child should be suitably adjusted to the child's body ensuring any straps are not twisted.
18. Don't use any load bearing contact points other than those described in the instructions and marked on the child car seat.
19. Do not use a forward-facing child car seat when child stature less than 76cm.
20. The instructions can be retained on the child car seat for it's life time, and please take good care of the manual.
21. The rigid items and plastic parts of the child car seat must be located and installed so that they are not liable, during everyday use of the vehicle, to become trapped by a movable seat or in a door.
22. The child car seat should only be used in a forward facing position when in use.
23. Any luggage or other objects liable to cause injuries in the event of a collision should be properly secured.
24. If you have any question about using and the installation of the child car seat. Please contact our customer services team.
25. The child car seat should not be used without the cover.
26. When installing the child car seat, the user should also refer to the vehicle manufacturer's handbook.
27. The child restraint may not fit in all approved vehicles when used in one or more of the installation positions featured in this manual.

IMPORTANT - DO NOT USE BEFORE THE CHILD'S AGE EXCEEDS 15 MONTH.

2. Features

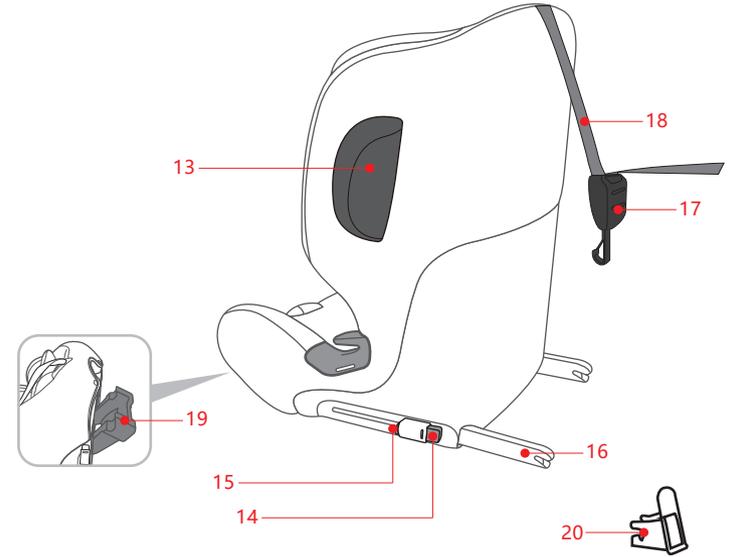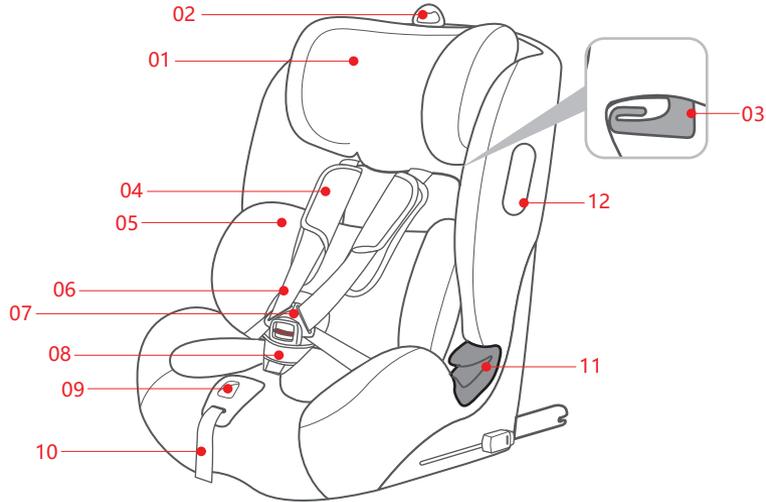

NO.	ITEM NAME	NO.	ITEM NAME	NO.	ITEM NAME	NO.	ITEM NAME
01	Headrest	02	Headrest adjustment handle	03	Shoulder belt guide	04	Shoulder pad
05	Inner cushion	06	Shoulder straps	07	Harness buckle	08	Buckle pad
09	Harness adjustment button	10	Adjustment strap	11	Lower belt guide	12	SIP fitting groove
13	SIP	14	ISOFIX 2nd lock button	15	ISOFIX release button	16	ISOFIX attachment
17	Top Tether hook	18	Top Tether	19	Recline adjustment flap base	20	ISOFIX insert guide

3. Use in the vehicle



Danger! Do not use the child car seat in the passenger seat with an active frontal airbag. (The airbag may cause death or serious injury to the child)


Please read the instruction manual carefully so that the child car seat is used and installed correctly.



Correct / suitable




Wrong / not suitable

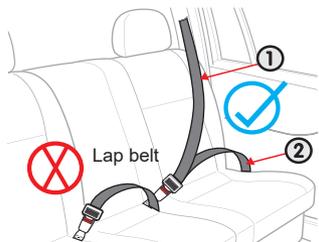

① Vehicle seat belt - shoulder belt


② Vehicle seat belt –lap belt

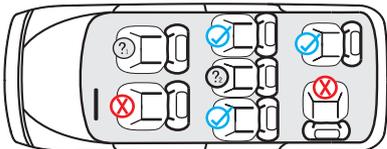

- ① The child car seat should not be used in the front passenger seat with an active frontal airbag.
- ② The shoulder belt, lap belt and ISOFIX must all be installed in this position for the child car seat to be used here.

4. Adjusting and using the child car seat

4-1 Recline adjustment

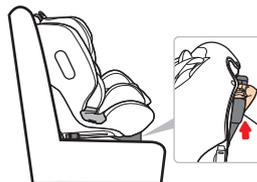

Find the recline adjustment flap base **19** and pull it up.

When used in the recline position the car seat may not fit all vehicles.

4-2 Harness adjustment




Loosen: Press the harness adjustment button **09**, grasp and pull the shoulder straps forward. (DO NOT pull on the shoulder pads 04).



Tighten: Grasp the adjustment strap **10** with one hand and pull forward.

4-3 Headrest adjustment

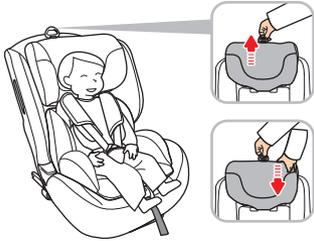

Up: Pull the headrest adjustment handle **02** up to adjust the height.

Down: Pull the headrest adjustment handle **02** up with one hand, and press the headrest **01** down with the other hand.

4-4 Buckle adjustment




1. Put the right and left tongues of the buckle together, and insert into the harness buckle **07**, it is locked when a “CLICK” is heard. Pull the adjustment strap to tighten the shoulder straps **06**. Adjust the shoulder straps **06** so that the chest pads are close to the child’s chest. (Please refer 4-2 to check how to adjust the shoulder belt.)


Tips: Press the red button to release the buckle.

4-5 5 point harness system removal

1. Open up the shoulder pads **04** and separate the shoulder pad connector. Then remove the shoulder pads.
2. Remove the inner cushion **05**, release the harness buckle **07**, pull out buckle pad **08**, store the buckle under the cover, store the shoulder straps **06** and buckle latches together under the cover.



4-6 ISOFIX installation and removal



ISOFIX Installation

1. If your vehicle is not equipped with the ISOFIX insert guides as standard. Clip the two ISOFIX insert guides **20** which are included with the seat with the cut-out facing upwards onto the two ISOFIX attachment point **C** of your vehicle.

2. Press both the ISOFIX 2nd lock button **14** and ISOFIX release button **15**, and extend the ISOFIX **16**.
3. Insert the ISOFIX onto the two ISOFIX anchor points **C**, until there is a click and the indicators are completely green.
4. Push the car seat towards the back of the seat as far back as it will go.
5. Shake the base of child car seat to ensure the ISOFIX is fixed firmly.




Notice:

You must ensure that the left and right ISOFIX attachments are consistent before using the child car seat.

ISOFIX removal

Press both the ISOFIX 2nd lock button **14**, and ISOFIX release button **15**, the ISOFIX can be removed when there is a click noise.

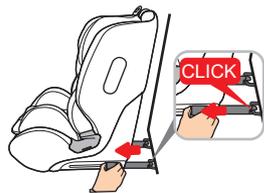

4-7 Top Tether usage



1. Take the top tether **18** out from the bottom of the car seat, adjust the Top Tether by pressing the Top Tether adjusting button **N**, and pass underneath the vehicle seat headrest.
2. Fit the top tether hook **17** onto the anchor point according to the car manual, then tighten the top tether **18** (tighten the Top Tether until the indicator shows green).



Notice:

Never use the luggage hook as a replacement for the Top Tether anchor. Always check the vehicle manual and locate the below mark.



4-8 Inner cushion usage



When the height of the child is below ≤ 87 cm, the inner cushion **05** must be used.

Tips: The inner cushion **05** ensures the child is more comfortable and safer.

4-9 Side Impact Protection usage (SIP optional accessory)



Installing the SIP

Slide the SIP into the groove on the side closest to the door.

Remove the SIP

Slide the SIP up, to remove it.

Notice: If you use the SIP, the car seat may not fit all vehicles.


4-10 Removing and refitting the cover

Cover removal

1. Adjust the headrest to the highest position (refer to 4-3), remove the inner cushion **05**.
2. Release harness buckle **07**, remove shoulder pads **04** and buckle pad **08** (refer to 4-5).
3. Carefully remove the headrest pad and cover.

Cover fitting

1. Adjust the backrest to most upright position and adjust the headrest to the highest position.
2. Re-fit the headrest pad and cover.
3. Re-fit the shoulder pads **04** and buckle pad **08**.

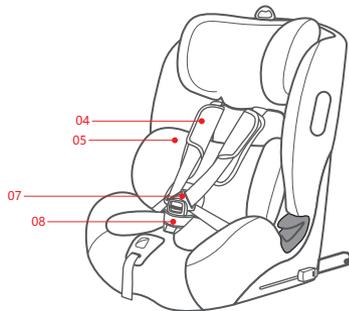

5. Installation

5-1 76cm-105cm(≤18kg)

ISOFIX + Top Tether + harness system fitting instructions

1. Fit the ISOFIX **16** onto the ISOFIX anchor points in the vehicle (refer to 4-6).
2. Take the top tether hook **17** and pass through the vehicle seat headrest and attach it to vehicle Top Tether anchor point, tighten the top tether **18**(refer to 4-7).
3. Secure your child in the car seat using the 5 point harness system.




Notice:

1. Check the harness belts and vehicle belt, ensure the child and car seat are both secure and the car seat is correctly installed.
2. The Top Tether indicator will show 'green' when it is tightened.
3. Ensure that there are no folds or twists in the harness system.
4. Use the SIP on the side closest to the door.
5. Open the recline adjustment flap base to adjust the recline position (refer to 4-1).

5-2 100cm-150cm

Vehicle 3-point belt + optional ISOFIX fitting instructions

1. Remove the harness system (refer to 4-5).
2. The vehicle seat belt **S** should go through shoulder belt guide **03** and cross over the child's shoulder.
3. The vehicle belt **T** should cross over the child's lap.
4. Feed both belts through the second belt guide 11 and insert them into the vehicle's buckle.
5. The ISOFIX fitting **16** is optional here. To use the ISOFIX refer to 4-6.

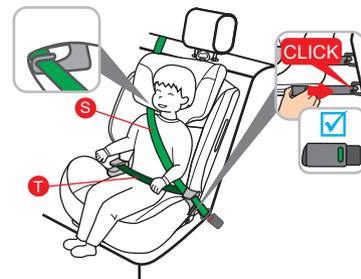

Notice:

1. Check the vehicle belt, make sure the child and car seat are both secure and the car seat is correctly installed.
2. Ensure that there are no folds or twists in the vehicle belt.
3. Use the SIP on the side nearest the door.
4. Open the recline adjustment flap base to adjust the recline position (refer to 4-1).

6. Cleaning & Maintenance

Important tips: The cover is a safety feature. Never use the child seat without it, don't put your child's safety at risk by using other replacement covers, they could stop the child seat from protecting your child because the covers are an integral part of the seats safety and security.

Washing instruction

The cover is removable and washable at 30°C, line dry only.



Machine wash, cold



Do not bleach



Do not tumble dry



Do not iron



Dry clean, any solvent

7. Notice

Notice

This is an i-Size Enhanced Child Restraint System. It is approved according to UN Regulation No.129, for use in, i-Size compatible vehicle seating positions as indicated by vehicle manufacturers in the vehicle user's manual. If in doubt, consult either the Enhanced Child Restraint System manufacturer or the retailer.

Notice

This is an i-Size booster seat Enhanced Child Restraint System. It is approved according to UN Regulation No. 129, for use primarily in i-Size seating positions as indicated by vehicle manufacturers in the vehicle user's manual. If in doubt, consult either the Enhanced Child Restraint System manufacturer or the retailer.
Only suitable if the approved vehicles are fitted with 3 point safety-belts, approved to UN/ECE Regulation No. 16 or other equivalent standards.

8. Steps to take after an accident

After an impact if the speed was greater than 10km/h, the child car seat should not be used and you should consult your insurer and retailer for further assistance.

9. Warranty

For the seat, we extend a warranty against defects in materials and workmanship for up to one year. The warranty period begins on the date of purchase.

A valid receipt is required for all claims.

The warranty covers a child car seat that has been handled properly and is returned in an orderly and clean condition.

The warranty does not cover:

- Normal wear and tear, and damage due to unreasonable use.
- Damages due to improper or inordinate usage.

Covers: All of our fabrics meet the highest standards regarding colourfastness against UV radiation. Nevertheless, all fabrics fade when exposed to UV radiation. This is not due to defective materials, but to normal wear and tear, which is not covered by the warranty.

Please contact the manufacturer immediately in the event of a warranty claim.